


GEDA 300 Z/ZP





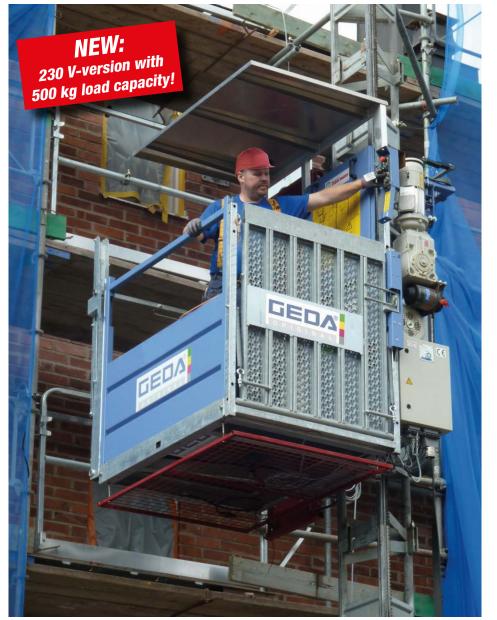

GEDA 300 Z/ZP

The "baby" among the GEDA transport platforms features a range of benefits. When folded, the GEDA 300 Z/ZP is only 0.85 m wide, allowing easy transport to the construction site – even through narrow driveways. With the convenient fork lift pockets, the complete device can easily be transported with a pallet truck or fork lift truck.

Once at the construction site, the GEDA 300 Z/ZP reveals its true size: its compact 1.35 \times 0.95 m platform and the flat cable bin can be set up even on the narrowest pavements and in the smallest courtyards.

The two separate controls quickly turn the material hoist into a transport platform which is also approved for transporting up to three passengers.

In addition to the 400 V model, the device is also available as a 230 V version. The 230 V hoist can simply be connected to the existing power supply without requiring a separate high-voltage connection. This is often a great advantage, especially when renovating older buildings.

Technical data:



300 kg/3 persons 500 kg/3 persons



50 m




9 m/min 12 m/min



1.7 kW/230 V/50 Hz/16 A 1.9 kW/400 V/50 Hz/16 A

GED \$\alpha\$ 300 Z/ZP

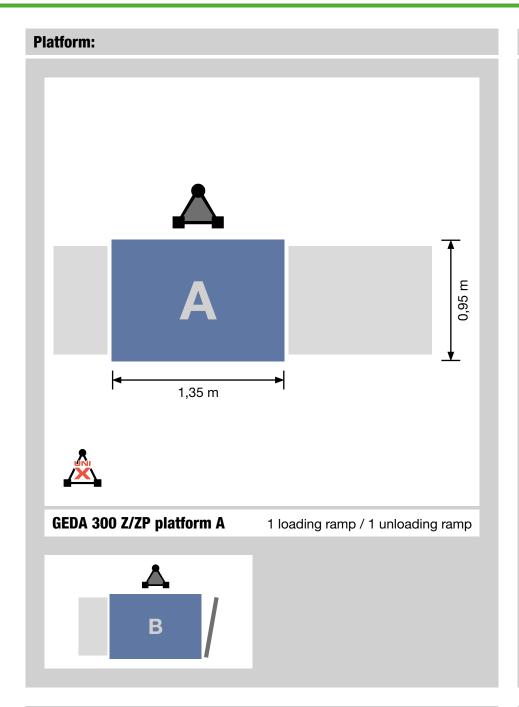



Accessories:

For a wide range of accessories visit: www.geda.de




Further landing level safety gates:

Art. No. 68000;68050


Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel
	panel

GED \$\alpha\$ 300 Z/ZP


Space requirements:

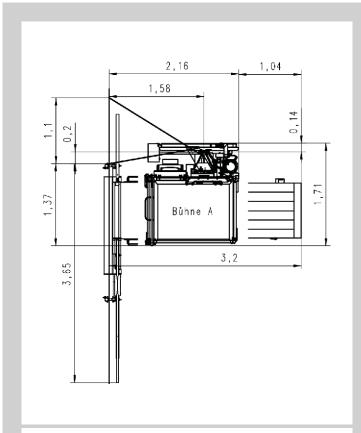


Normal space requirement in front of a wall

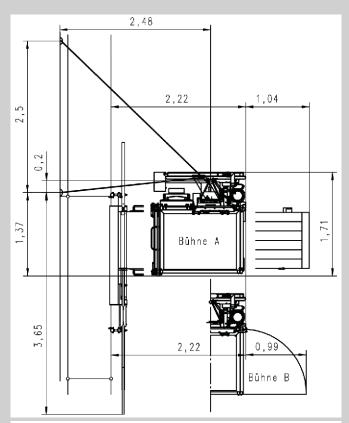

Normal space requirement in front of a scaffold



Shaft dimensions (no person transport)



Shaft dimensions (person transport)